


# PRECISION RESISTORS

## RHP-H

## Features

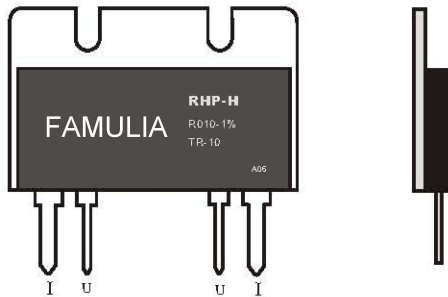

- # Up to 15 W permanent power
- # Max. permanent current: 120 A(1mOhm)
- # Very high precision of tolerance and TCR
- # 4-terminal connection
- # Thermal design of reliability

## Applications

- # Measurement equipment
- # reference resistors in laboratories
- # High precision current source
- # Laboratory power supplies

## Technical data

Resistance values	<b>Ohm</b>	0.001 to 0.1
Tolerance	<b>%</b>	0.1 / 1
Temperature coefficient (0-80°C)	<b>ppm/K</b>	<3 / 10
Applicable temperature range	<b>°C</b>	-55 to +140
Power rating	<b>W</b>	5 / 15 (on a heatsink)
Thermal resistance to ambient(Rth)	<b>K/W</b>	<10
Thermal resistance to aluminium substrat (Rthi)	<b>K/W</b>	<3
Dielectric withstanding voltage	<b>V</b>	AC/DC 2000
Inductance	<b>nH</b>	<10


**\*The radiator is arranged**

According to the maximum power used to measure the temperature of radiator, the maximum not more than 80°C.

# PRECISION RESISTORS


## RHP-H

Temperature dependence of the electrical resistance of RHP-H resistors (range  $\pm 10$  ppm/K)

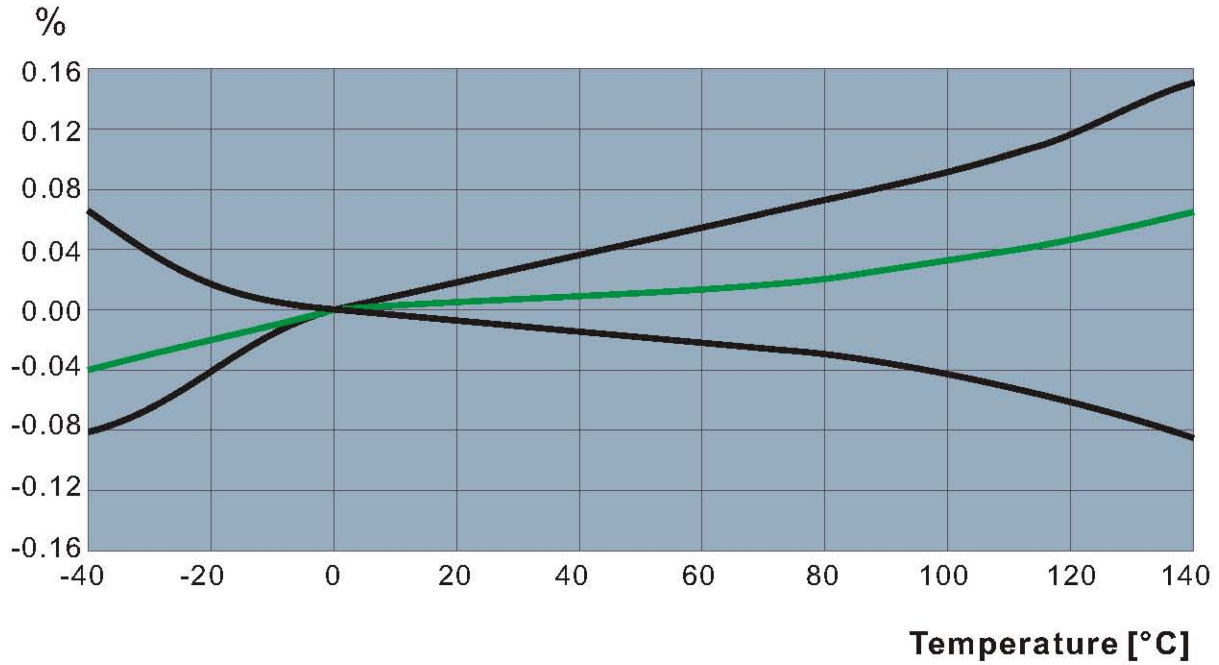

- Limiting curve
- typical temperature dependence of a RHP-H resistor

## Power derating curve

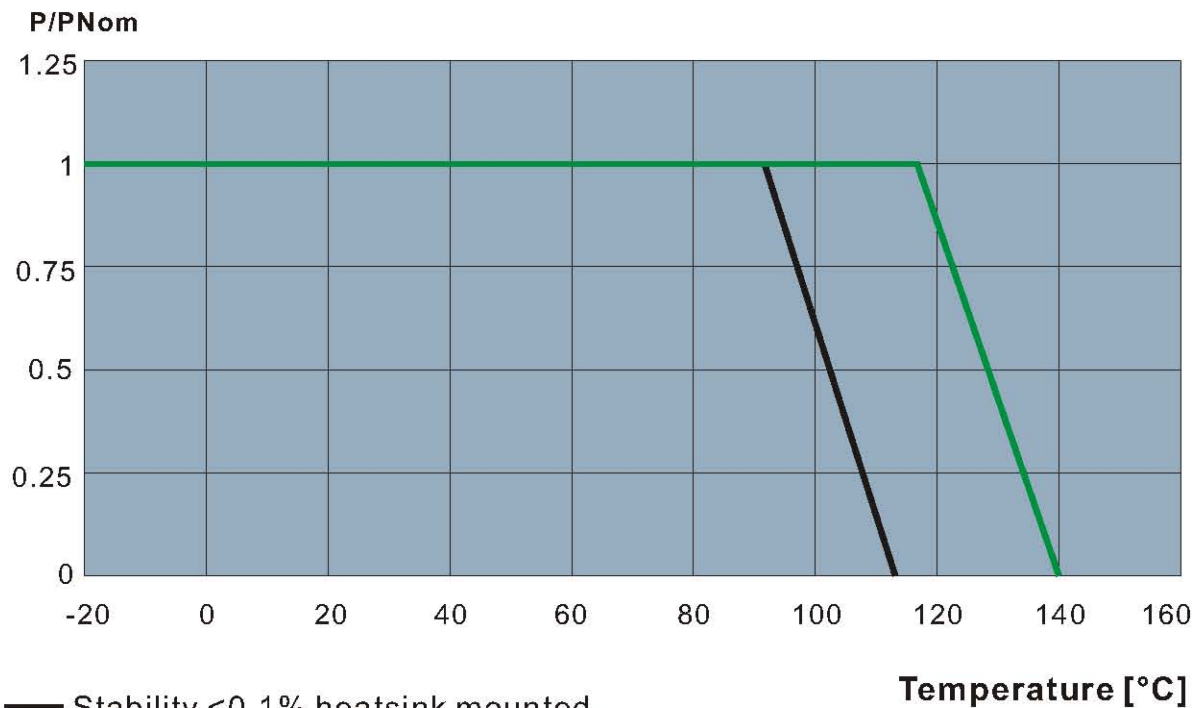

- Stability < 0.1% heatsink mounted
- Stability < 0.2% heatsink mounted

# PRECISION RESISTORS

## RHP-H Standard resistance values and tolerances

Resistance values	Tolerance		
	0.1%	0.5%	1%
R001			✓
R002			✓
R005		✓	✓
R008		✓	✓
R010	✓	✓	✓
R020	✓	✓	✓
R050	✓	✓	✓
R100	✓	✓	

## standard Temperature coefficient and tolerances (ppm/K)

Resistance values	Temperature coefficient		
	3PPM/K	5PPM/K	10PPM/K
R001		✓	✓
R002		✓	✓
R005	✓	✓	✓
R008	✓	✓	✓
R010	✓	✓	✓
R020	✓	✓	✓
R050	✓	✓	✓
R100	✓	✓	✓

## Mechanical dimensions [mm]

